



750 SELF-STORAGE DOOR

self-storage 750



Maximum
10' x 10'



Self-Storage/
Light-Duty



Wind-Load
Rated



Quality
Guaranteed

STANDARD FEATURES

Pre-Lubricated Springs: During production, springs are factory lubricated and enclosed in a tube to protect them from the environmental elements.

Dead Axle & Barrel Assembly: An enclosed spiral barrel houses the dead axle assembly and offers durability and smoother operation as weight is distributed throughout the barrel.

Ratchet Tensioning Device: The tension wheel's eight adjustable positions let you fine-tune both springs simultaneously, ensuring equal pull on each side for smooth, balanced door operation.

26-Gauge Corrugated Door Curtain: Manufactured from galvanized grade-80 steel and coated with super-durable polyester paint in more than 30 color options.

Insulated Version Available: Side and top draft stops included.

Metal Windlocks: 12-gauge provides strength and security. Windlocks do not come in contact with guides during normal door operation.

Scan below to see additional features and options.

The **750 Series** from Janus International is wind load rated and ideal for light-duty use in carports, barns, sheds and self-storage/commercial unit mix. Our industry-leading 3rd Generation roll-up doors are manufactured to be durable and easy to install. The 750 Series self-storage door is particularly well-suited for use in coastal areas or other locations prone to high wind speeds.

Scan for
more information,
technical specs, and
drawings of this door:





Scan to see this door:






750 SELF-STORAGE DOOR

Model Number	650	650NS	750	850
Maximum Width	10'	10'	10'	8' 8"
Maximum Height	10'	10'	10'	12'
Application				
Wind Load Rated	✗	✗		
Barrel	9-1/2"	9-1/2"	9-1/2"	9-1/2"
Guide	2"	2"	2" / 2-1/4"	4"
Guide Gauge	18-ga	18-ga	18-ga / 16-ga	12-ga
Reduced-Drive Chain Hoist Standard Over 10'w or 10'h	✗	✗	✗	
Factory Installed Brackets	✓	✓	✓	✗
Warranty	3-Year	3-Year	3-Year	3-Year
Impact Rated	✗	✗	✗	✓
Color Options	All	All	All	White Only
Vision Panels Optional	✗	✗	✗	✗
Insulation Optional	✓	✓	✓	✓
Corrugated Curtain Gauge	26-ga	26-ga	26-ga	24-ga

750 HIGHLIGHTS

- Wind Load Windlock
- Self-Storage/Light Duty
 - Carports
 - Barns
 - Sheds

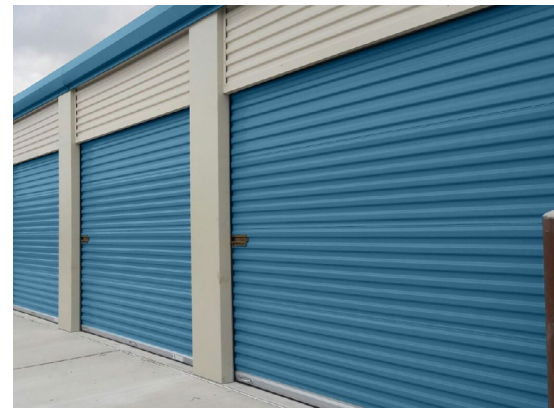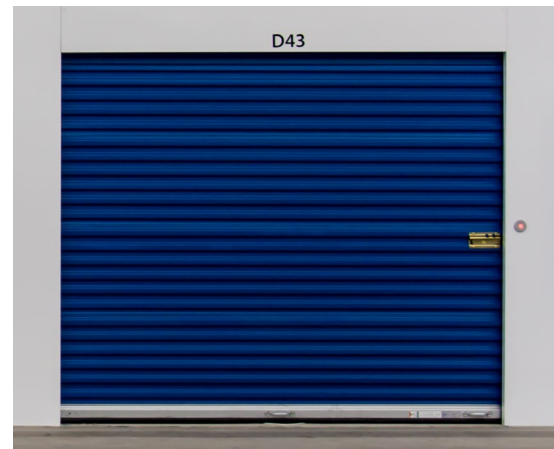

JANUSINTL.COM

HEADQUARTERS:
 Janus International Group
 135 Janus International Blvd.
 Temple, GA 30179
 866-562-2580

marketing@janusintl.com

PLEASE VISIT OUR WEBSITE FOR ADDITIONAL INFORMATION:

- ADA Compliance
- Color Options
- Installation
- Technical Drawings
- Warranty
- Additional Locations